

# Beta



20  
22

**NEW  
ITEMS 2022**


Promotion valid until 31/12/2022



# Beta C45PRO

## PROFESSIONAL STURDY TIDY

C45PRO IS THE PROFESSIONAL WORKSHOP EQUIPMENT that helps you make the most of your working space. Based on the new 2021 design and the technical improvements developed for the frame, it boasts an excellent quality/price ratio.

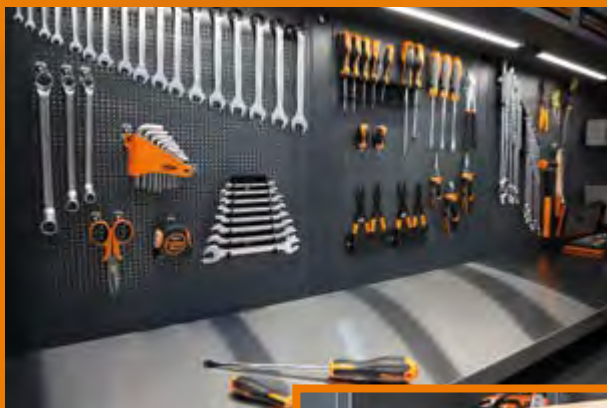

Worktops available in stainless steel coated MDF or multi-ply wood



Adjustable feet




New aluminium handle

## C45PRO F

### WORKSHOP EQUIPMENT COMBINATION C45PRO F comprising:

- 1 fixed two-door module (C45PRO MA)
- 1 mobile roller cab with 7 drawers (C45PRO C7)
- 1 fixed module with 7 drawers (C45PRO M7)
- 1 fixed module with 2 built-in reels (C45PRO ACT)
- 1 fixed service module (C45PRO MS)
- 2 perforated tool panels (C45PRO PF)
- 1 perforated tool panel, can be fitted with a power socket (not included) (C45PRO PFE)
- 3 wall-mounted cabinets (C45PRO PM)
- 1 tool wall system with aluminium shutter (C45PRO PA)
- 6 wall brackets, wide type (C45PRO SL)
- 2 wall brackets, wide type (C45PRO SS)
- 2 single-door cabinets (C45PRO AS1)

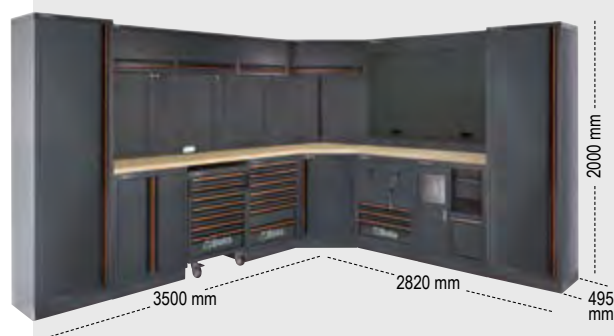

## C45PRO G

### WORKSHOP EQUIPMENT COMBINATION C45PRO G comprising:

- 1 fixed module with 2 built-in reels (C45PRO ACT)
- 1 mobile roller cab with 7 drawers (C45PRO C7)
- 1 fixed module with 7 drawers (C45PRO M7)
- 1 fixed two-door module (C45PRO MA)
- 1 perforated tool panel (C45PRO PF)
- 1 perforated tool panel, can be fitted with a power socket (not included) (C45PRO PFE)
- 2 wall-mounted cabinets (C45PRO PM)
- 1 tool wall system with aluminium shutter (C45PRO PA)
- 5 wall brackets, wide type (C45PRO SL)
- 2 wall brackets, wide type (C45PRO SS)
- 2 single-door cabinets (C45PRO AS1)





**C45PRO FX**

045000035

- 1 **stainless steel** coated MDF worktop (C45PX/3-2.0MT)
- 1 **stainless steel** coated MDF worktop (C45PX/2-1.3MT)
- 1 self-supporting complete corner with **stainless steel** coated MDF worktop (C45PRO C/X)



576 kg

**C45PRO FW**

045000045

- 1 **multi-ply wood** worktop (C45PW/3-2,0MT)
- 1 **multi-ply wood** worktop (C45PW/2-1,3MT)
- 1 self-supporting complete corner with **multi-ply wood** worktop (C45PRO C/W)



572 kg



**C45PRO GX**

045000036

- 1 **stainless steel** coated MDF worktop (C45PX/3-2,0MT)
- 1 **stainless steel** coated MDF worktop (C45PX/1-0,7MT)
- 1 self-supporting complete corner with **stainless steel** coated MDF worktop (C45PRO C/X)



507 kg

**C45PRO GW**

045000037

- 1 **multi-ply wood** worktop (C45PW/3-2,0MT)
- 1 **multi-ply wood** worktop (C45PW/1-0,7MT)
- 1 self-supporting complete corner with **multi-ply wood** worktop (C45PRO C/W)



504 kg

## C45PRO H

### WORKSHOP EQUIPMENT COMBINATION C45PRO H comprising:

- 1 fixed module with 2 built-in reels (C45PRO ACT)
- 1 mobile roller cab with 7 drawers (C45PRO C7)
- 1 fixed module with 4 drawers (C45PRO M4)
- 3 wall-mounted cabinets (C45PRO PM)
- 3 perforated tool panels (C45PRO PF)
- 3 wall brackets, wide type (C45PRO SL)
- 1 wall bracket, narrow type (C45PRO SS)
- 1 two-door cabinet (C45PRO AS2)



### C45PRO HX 045000038

- 1 stainless steel coated MDF worktop (C45PX/3-2,0MT)



 300 kg

### C45PRO HW 045000039

- 1 multi-ply wood worktop (C45PW/3-2,0MT)



 299 kg


## Configure your workshop in 3D online



**3D**  
view

[www.beta-tools.com](http://www.beta-tools.com)

## MM63

 024580063


### EVA FOAM TRAY with T-handle wrenches with swivelling hexagon sockets

○ 952 7-8-10-12-13-14-17-19 mm



**8x**

### FOR C45PRO DRAWERS







**COMPACT  
AND EASY TO CARRY**  
COMPLETE, EVERYTHING  
THAT IS NEEDED AT HAND



**FUNCTIONAL  
BITS ARE EASY TO TAKE OUT  
AND PUT IN**



**CUSTOMIZABLE**

**900/C39N**

009000947

ASSORTMENT OF 11 HEXAGON  
SOCKETS, 21 bits  
and 7 accessories,  
in plastic case

1/4" 1/4"



**39x**

AVAILABLE FROM  
END OF JUNE

	900		5-5,5-6-7-8-9-10-11-12-13-14 mm	11
	900/20		50 mm	1
	900/20L		100 mm	1
	900/25			1
	900BG/30C		128 mm	1
	892/0		■ 1/4 - ● 1/4	1
	895/1		○ 1/4 - □ 1/4	1
	861LP		● 0,6x4,5-1,2x6,5-1,2x8 mm	3
	861PH		⊕ PH1-PH2-PH3	3
	861PZ		⊕ PZ1-PZ2-PZ3	3
	861PE		○ 2,5-3-4-5-6 mm	5
	861RTX		⊗ T10-T15-T20-T25-T27-T30-T40	7
	900/55Z		⊗ 126 mm	1

**900/C39U**

009001947

ASSORTMENT OF 11 GEAR  
LOCK SOCKETS, 21 bits  
and 7 accessories,  
in plastic case

1/4" 1/4"



**39x**

AVAILABLE FROM  
END OF JUNE



	900U	mm	5-5,5-6-7-8-9-10-11-12-13-14 mm	11
		"	13/64-7/32-1/4-9/32-5/16-11/32-3/8-7/16-15/32-1/2-9/16	
		XZN	M6-M8-M10-M12-M14-M16-M18	
		TX	E7-E8-E10-E12-E14-E16-E18	
	900/20		50 mm	1
	900/20L		100 mm	1
	900/25			1
	900BG/30C		128 mm	1
	892/0		■ 1/4 - ● 1/4	1
	895/1		○ 1/4 - □ 1/4	1
	861LP		● 0,6x4,5-1,2x6,5-1,2x8 mm	3
	861PH		⊕ PH1-PH2-PH3	3
	861PZ		⊕ PZ1-PZ2-PZ3	3
	861PE		○ 2,5-3-4-5-6 mm	5
	861RTX		⊗ T10-T15-T20-T25-T27-T30-T40	7
	900/55Z		⊗ 126 mm	1

# 1048N



DIN ISO 8976

## SLIP JOINT PLIERS, slip-proof PVC coated handles

### Main features:


- Tooth geometry designed for better pipe and hexagon hold: up to 60 mm for the 300-mm size
- Wider head/handle angle for improved ergonomic handling
- Triangular section grip for a more comfortable contact surface
- Up to 8 adjustment options
- Tapered head allowing access to small spaces
- Case-hardened nail for improved wear resistance
- Contrast retainer preventing accidental hand crushing
- Phosphated finish
- Slip-proof PVC handles
- Made from chrome-vanadium steel



1048N 175

1048N 250

1048N 300



### FUNCTIONAL ERGONOMIC RESISTANT



**THE IMPROVED GEOMETRY OF THE TEETH** - as subjected to induction hardening - ensures an effective, firm, safe, lasting hold for slip joint pliers 1048N.



### UP TO EIGHT ADJUSTMENT OPTIONS

Up to 60 mm  
for the  
300 mm size

**THE GRIP QUALITY,** enhanced by a head profile synonymous with optimized ergonomic handling and functionality, sets Polygrip pliers 1048N apart from the conventional pliers available in the market.



The peculiar slip joint provides optimal resistance to stress, while resulting in improved hexagon and pipe hold, based on eight adjustment options.

**1048N/D3**

010480923

**SET of 3 slip joint pliers**

1048N 175  
1048N 250  
1048N 300



	L mm	A Max mm	L1 mm	S mm	g	
<b>1048N 175</b>	175	36	31	11	189	010480910
<b>1048N 250</b>	250	46	38	13	354	010480915
<b>1048N 300</b>	300	60	44	14,8	554	010480920



**331C**

003310050

**PORTABLE C-SHAPED PIPE CUTTER**  
for copper and light alloy pipes

- For small spaces

**POCKET-SIZED**



Ø mm	L mm
15÷22	78


**332/2**

003320003

**MINI PIPE CUTTER**  
for copper and light alloy pipes

- Compact
- For cutting pipes in small spaces

**FOR SMALL SPACES**



Ø mm	L mm
3÷28 1/8"÷1"1/8	63

**361N**

003610014

**ADJUSTABLE LEVER PIPE WRENCH**

- Fast and easy one-handed operations
- Heavy duty model
- Self-locking/adjusting type

AVAILABLE FROM SEPTEMBER




L mm	Ø max "	Ø max mm
350	1" 1/2	49

# 387

003870001

**PIPE BENDER** for copper and nonferrous metal pipes, with interchangeable forms 3/16"-1/4"-5/16"-3/8"



L mm	Ø "
255	3/16"-1/4"-5/16"-3/8"

# 398

003980008

**WORKBENCH CHAIN VICES,** painted



L mm	Ø "
250	1/2"-8"

9,6 kg

# 1103

011030090

**FLAT HAT BOLT CUTTER** for rod irons, bolts and electrowelded mesh for concrete reinforcement



- Cutting capacity:
- Ømax = 12 mm
  - Ømax (HRC 48) = 6 mm



L mm
950

3,5 kg



## 1243LP/D6

012430016

SET OF 6 SCREWDRIVERS  
WITH STEEL HEADS,  
for slotted head screws

- 1241 5,5x100 - 6,5x125 - 8x150 - 10x175 - 12x200 - 14x250 mm



Thanks to their sturdiness and particular construction, the screwdrivers are used for multiple heavy-duty functions such as the removal of welding points, damaged screws and levers.

- Bi-material handle
- Go-through hexagon blade for increased sturdiness and force transmission
- Steel head

## 1243/S11

012430021

SET OF 11 SCREWDRIVERS  
WITH STEEL HEADS

- 1241 5,5x100 - 6,5x125 - 8x150 - 10x175 - 10x200 - 12x200 - 14x250 mm
- 1242 PH1x100 - PH2x100 - PH3x150 - PH4x200 mm




LEVER HANDLES WITH  
ERGONOMIC ANGLES  
TO MINIMIZE EFFORTS



## 1691MG

MEASURING TAPES WITH FIXED MAGNETS, shock-resistant ABS casings, steel tapes, precision class: II



	L mm	S mm	
1691MG/5	5	25	016910405
1691MG/8	8	25	016910408
1691MG/10	10	25	016910410

## 1693L 40

016930040

LASER DISTANCE METER, multipurpose, 40 m, with positioning levels

IP54



### Measurements:

- Single distance measurement
- Continuous measurement or minimal measurement

### Functions:

- Addition/subtraction
- Area measurement
- Volume measurement
- Variable indirect measurement (Pythagorean measurement)
- Tilt measurement

### Features:

- Auto power off
- Battery life: up to 5,000 measurements
- Soft cloth case (included)

40 m



POSITIONING LEVELS



### Technical data:

- Measurement range: 0.05 ÷ 40 m (0.2in ÷ 131ft)
- Scale selection: m, in, ft
- Measurement accuracy: ±1.5 mm (± 0.06 in)
- Laser class: 2
- Max. storage: 99 units
- Batteries: AAA 2 x 1.5V

## 1760S

017600022

COMPACT DIGITAL MULTIMETER, TRUE RMS (effective value) reading

IP40



### Features:

- IP40 protection
- Autoranging
- Large direct reading display, backlit, blue
- Self-power down
- Low battery indication
- Supplied in a soft case
- CAT III 600V

TRUE RMS  
(effective value)  
READING



153 mm  
42 mm  
75 mm

### Measurable parameters:

- DC voltage: 200 mV-2/20/200/600V
- AC voltage: 100/600V
- DC current: 200 mA-10 A
- AC current: 0,01-10 A
- Resistance: 200Ω - 2/20/200 kΩ - 2 MΩ
- Diode test: 0.4 ÷ 0.7 V dc
- Power supply: 2 1.5V batteries, type AAA



# 1651DGTB


DIN 862

UNI EN ISO 13385-1



## DIGITAL VERNIER, reading to 0.01 mm

- Reading to 0.01 mm
- Screw slider locking
- mm/inch conversion
- Zero setting at any position
- Square depth rod up to 300 mm
- In hard plastic case

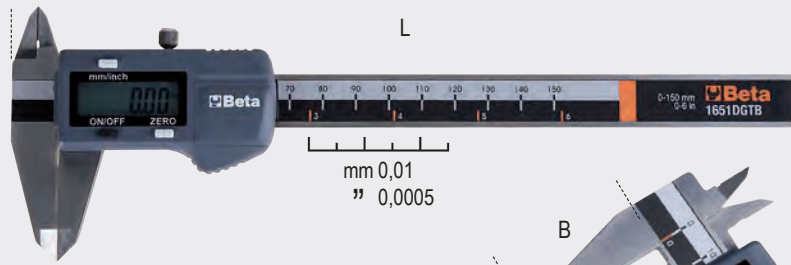

mm 0,01  
" 0,0005



	A Max mm	L mm	B mm	G mm	
<b>1651DGTB 150</b>	150	235	40	0,01-0,0005	016510211
<b>1651DGTB 200</b>	200	285	50	0,01-0,0005	016510212
<b>1651DGTB 300</b>	300	400	60	0,01-0,0005	016510213

# 1651DGTB/IP

016510711


DIN 862

UNI EN ISO 13385-1




## DIGITAL VERNIER, reading to 0.01 mm, degree of protection IP67

- Reading to 0.01 mm
- Screw slider locking
- mm/inch conversion
- Automatic power on by moving the vernier along its rod
- Zero setting at any position
- HOLD function
- Absolute and incremental measurement modes

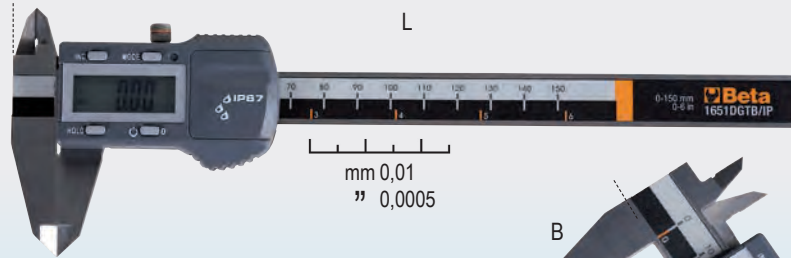

mm 0,01  
" 0,0005

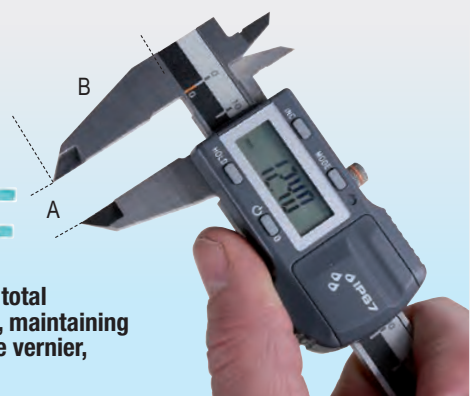

# WATERPROOF



Degree of protection IP67 provides total protection against dust and liquids, maintaining the functional characteristics of the vernier, e.g. when it is totally immersed.

A Max mm	L mm	B mm	G mm
150	235	40	0,01


# 1658DGTB

DIN 863



## IP65 DIGITAL OUTSIDE MICROMETERS, reading to 0.001 mm

- Reading to 0.001 mm
- Hardened steel calipers
- Lever slider locking
- mm/inch conversion
- Zero setting at any position
- Absolute and incremental measurement modes
- Supplied with a calibration wrench

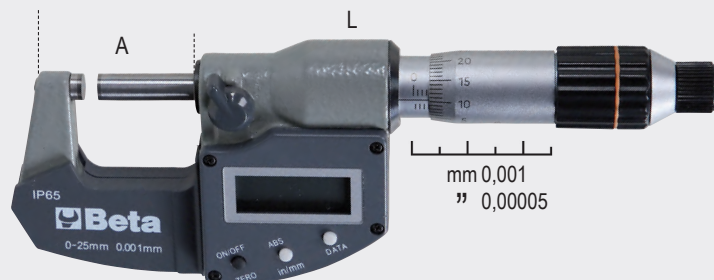

mm 0,001  
" 0,00005



	A Max mm	L mm	G mm	
<b>1658DGTB 25</b>	0÷25	165	0,001	016580525
<b>1658DGTB 50</b>	25÷50	190	0,001	016580550



# WIRELESS RECHARGEABLE



## 1838POCKET

018380080

### ARTICULATED POCKET LED SPOTLIGHT, with dual light beam and wireless charging

- Rechargeable 3.7V 2600mAh Li-ion battery
- **2 charging modes:**
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 4.5 h with wireless charging base
  - 4 h with power supply
- Battery life: - main light: 3-9h  
- spot light: 4.5 h
- 3-LED battery level indicator
- Can be rotated 210°
- Nonslip rubber body
- Magnetic base
- 1 magnet on base
- IP65
- IK07
- Supplied with a USB-C cable



- **Dual light emission:**
  - main light: LED COB, 3 light intensities: 160 - 400 - 800 lumens
  - spot light: LED SMD, 250 lumens
- **Lighting angle:**
  - main light: 160°
  - spot light: 18°



Front: 160/400/800 lumen Spot: 250 lumen	Front: COB LED Spot: SMD LED
4 h	Wireless charging 4.5h
3-9h Spot: 4.5h	3.7V 2600mAh Li-ion
98x82x39 mm	IP65
-10°C + 40°C	

## 1838SW

018380142

### RECHARGEABLE, ARTICULATED LED INSPECTION LAMP, with wireless charger

- **Dual light emission:**
  - front: LED COB, 3 light intensities: 250 - 500 - 1000 lumens
  - spot (head): LED SMD, 200 lumens
- Rechargeable 3.6V 3.350mAh Li-ion battery
- **2 charging modes:**
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 6.5h with wireless charging base
  - 4.5h with power supply
- Battery life: - front: 3-5h  
- spot (head): 7h
- 3-LED battery level indicator
- Base can be rotated 180°
- Nonslip rubber body
- Double swinging hook
- Magnets on base and back
- IP65
- IK07



Front: 250/500/1000 lumen Spot: 200 lumen	Front: COB LED Spot: SMD LED
4.5 h	Wireless charging 6.5h
3-5h Spot: 7h	3.6V 3.350mAh Li-ion
260x53x40 mm	IP65
-10°C + 40°C	



# 1839BRW

018390002

## WIRELESS CHARGING BASE, compatible with 1838POCKET, 1838SW inspection lamps

- Two charging positions with magnetic connection, for simultaneous use
- With pull-out support for wireless mobile phone charging
- Charging status LED indicator
- Max. input: 10W x2
- Input: AC 100-240V 50/60Hz
- Output: DC 12V 1.5A  
DC 9V 2A  
DC 5V 3A
- USB-C port
- IP20
- IK07



Wireless charging  
Input 10W x2

USB Type-C  
QC 3.0 USB-C

IP20

101x190x28 mm



- Can be hung on wall through: 3 strong magnets on back 2 screw holes





# 1599GI

## PARALLEL BENCH VICES with INTERCHANGEABLE JAWS

- With square guide for heavy-duty jobs
- Interchangeable jaws with hardened surface

**JAWS WITH HARDENED SURFACE**

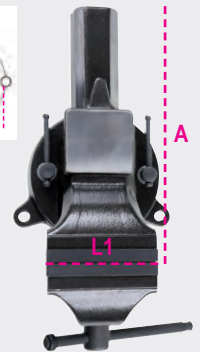

	L1 mm	BxH mm	Ø mm	A max mm	
<b>1599GI 100</b>	100	92x46	11	125	015990200
<b>1599GI 125</b>	125	108x54	13	150	015990225
<b>1599GI 150</b>	150	125x62	13	200	015990250
<b>1599GI 175</b>	175	140x70	15	220	015990275

# 1599GR

## PAIRS OF JAWS AND SPARE SCREWS for vices 1599GI





	L1 mm	
<b>1599GR 100</b>	100	015990920
<b>1599GR 125</b>	125	015990925
<b>1599GR 150</b>	150	015990950
<b>1599GR 175</b>	175	015990975

# 1860M

018600301


## MAGNETIC, QUICK-ADJUSTING CORNER WELDING VICES

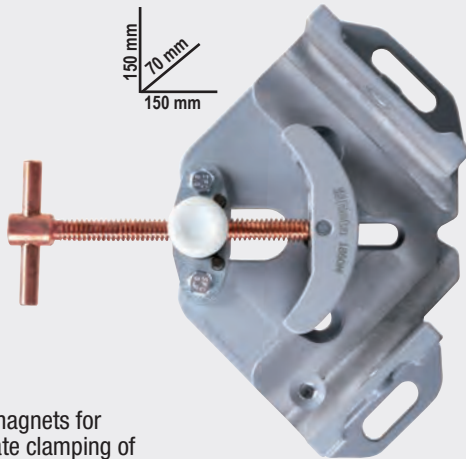

Strong magnets for immediate clamping of metallic parts to be welded

## SWINGING JAWS

ideal for locking differently sized parts

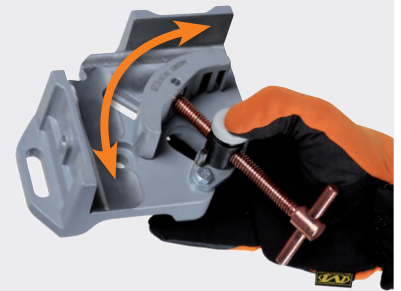

# 610L/5L

006100150

UNI EN ISO 6789

## CLICK-TYPE TORQUE WRENCH with L-shaped lever

- Selectable torque values: 120 - 140 - 160 - 180 - 200 Nm
- Torque accuracy:  $\pm 4\%$
- Extremely quick torque selection
- 1/2" square drive



12"

L1



L mm	L1 mm
470	80

## SPECIFIC FOR TYRE REPAIRERS

IT SUPPORTS TIGHTENING OF MOST COMMERCIALY AVAILABLE RIMS OF INDUSTRIAL VEHICLES AND SUVs.

The Beta 610L/5L torque wrench with L-shaped lever, specially designed for tyre repairers, allows right-hand tightening with 5 preset torque values : 120 - 140 - 160 - 180 - 200 Nm.



# 1471PT/C5

014710367



## IMPACT SOCKET KIT for brake calipers nuts

- 3 10-tooth sockets: 11.5 mm - 15 mm - 20 mm
- 2 7-tooth socket:  $\varnothing$  14 mm - 22 mm

12"



$\varnothing$ mm	L mm
25	50

# 1566R

015660015

## ADJUSTABLE TOOL for removing/installing steering arms

12"



$\varnothing$ mm
27÷43



# 1498/25A

014980125

## ELECTRONIC MULTIPURPOSE BATTERY CHARGER, 12-24V

### Features:

- Backlit graphic display
- Maximum continuous charging current: 25A
- Charging and maintenance
- Protected against polarity reversal, short circuits
- 9 charging stages
- Floating system
- SHOW ROOM function (13,8V - 21A)
- SUPPLY function (14V - 21A)
- Memory saving function (13.8V - 21A)
- Battery recovery function
- Clamp holder
- Reclining fixing hook
- Supplied accessories: cable with clamp

# 25A



130 mm  
75 mm  
260 mm



Pb Wet, Gal Dry, Agm  
LiFePo4 LITHIUM



### Technical data:

- Power supply: 220-240V
- Power: 390W
- Charging current: 5-25A
- Battery type: Agm - Wet - Lithium (LiFePo4)
- Charging capacity: 5-550Ah
- Maintenance capacity: 5-800Ah
- Output voltage: 12-24V
- Minimum battery voltage: 0.8V
- Protection degree: IP20

2 kg

# 1498TB/6-12

014980420

## ANALOGUE BATTERY TESTER, 6-12V

For testing 6V and 12V batteries up to 1000CCA



290 mm  
75 mm  
170 mm



950 g

**CABLE LENGTH: 500 mm**

BATTERY TESTER



# 6-12V



LOAD TEST	BATTERY CONDITION
OK (GREEN)	Battery capacity is OK. Battery may or may not be fully charged. Make sure it is completely recharged.
WEAK or BAD but needle remains in fixed position (YELLOW OR RED)	UNSATISFACTORY battery capacity. Battery may be faulty or not completely charged. If battery is not fully charged (100%) battery must be replaced.
WEAK or BAD but needle does not remain fixed in place - (YELLOW OR RED)	Battery may be faulty or to the ground. Replace battery.

# 1759LR

017590070

## COOLING SYSTEM WASHING TOOL

Based on the use of compressed air, high water pressure allows for effective cleaning system washing

- Supplied with 6 system connection adapters
- Operating lever with position locking for continuous use
- Supplied with a water quick coupling

### REMARKABLE WATER POWER



390x330x100 mm

2,6 kg



# 1760PA/AC-DC2000

017600003

## AMPEROMETRIC CLAMP with digital multimeter and data connection

TRUE RMS function in AC range

### Measurable parameters:

- DC voltage: 0.1mV ÷ 1000V
- AC voltage: 0.1mV ÷ 1000V
- AC current: 0.01A ÷ 2000A
- DC current: 0.01A ÷ 2000A
- Resistance: 0.1Ω ÷ 60MΩ
- Capacity: 1nF ÷ 6000 μF
- Frequency: 10kHz ÷ 20kHz
- Temperature: -20 °C ÷ 1000 °C -4 °F ÷ 1832 °F
- Power supply: 3 1.5V batteries, type AA (included)
- Data connection (version 4.0)

### DATA CONNECTION



380x280x100 mm

1,8 kg



300 mm  
43 mm  
110 mm



# 1478/K3

014780160



## PIN REMOVING PLIERS KIT with plastic clips assortment

**Kit contents:**

- Flat nose pliers (1 pc.)
- 90° bent nose pliers (1 pc.)
- 625 plastic clips in 16 different sizes
- Clips in 3 stackable PPL containers



**625 PLASTIC  
CLIPS**

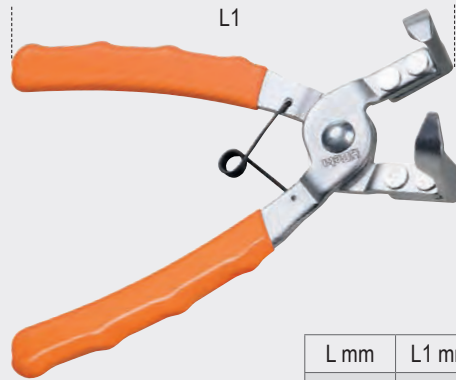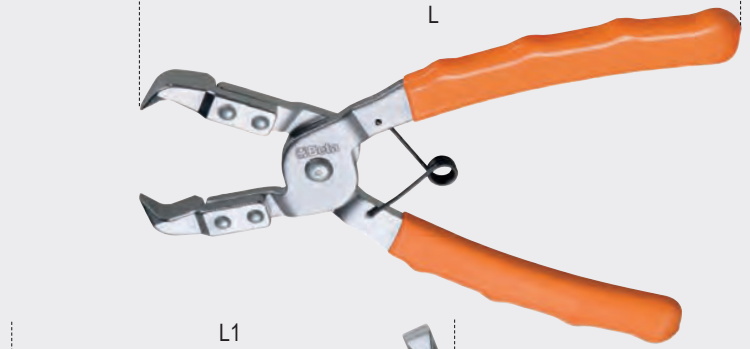

L mm	L1 mm
180	170



# 1478NSS

014780163

## PLASTIC PIN REMOVAL PLIERS with 3 release points



L mm
180



# 1764/K5

017640001

## MANUAL RIVETER for plastic rivets supplied with rivets in 4 sizes

**Kit contents:**

- 10 rivets Ø 5x17.2 mm
- 10 rivets Ø 5x15.8 mm
- 10 rivets Ø 6.3x25.2 mm
- 10 rivets Ø 6.6x17.2 mm




# 720FRD

007200633



12"

## IMPACT SOCKET FOR FORD WHEEL NUTS with aluminium damaged caps



Required when nut caps are damaged by impact wrenches




mm	L mm
18,5÷19,5	63

# 1362B

013620011

## CIRCULAR DENT REFLECTOR made from textile material

- Surface fully covered with a nonscratch material
- Supplied in a small transport bag

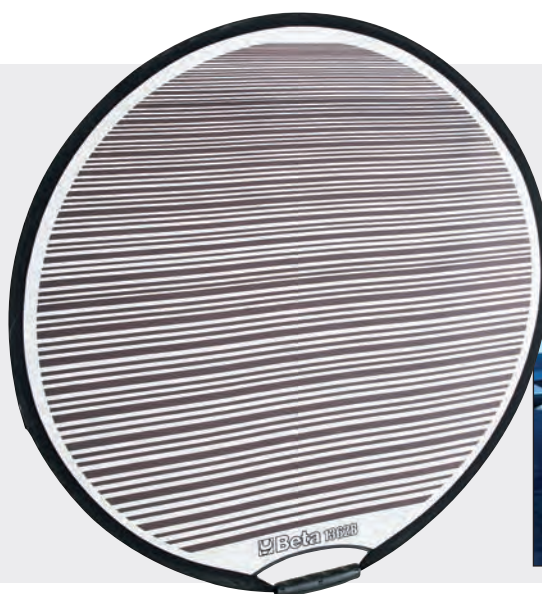


Ø mm
755

# 3095

030950001

## WORKBENCH STAND for motorcycle engines

Adjustable mounting brackets, for convenient, effortless workbench jobs on motorcycle engines



L mm	H mm	L1 mm
640	360	460



# 1364SE

013640001

## EXTENSION BODYWORK SUPPORT

### Specifications:

- 4 swivel castors, 2 with brakes
- Pantograph can be extended up to 1400 mm
- Vertically adjustable up to 1315 mm
- Position locking
- Contact surface covered with removable rubber



**EXTENDED  
UP TO 1400 mm**

L mm	H mm	P mm
215÷1400	780÷1315	890



# 1364SV

013640002

## BODYWORK SUPPORT with central tray

### Specifications:

- Contact surface covered in polyethylene
- Tray dimensions: 340x845x40 mm
- Foldable

**CENTRAL TRAY  
340X845X40 mm**



H mm
1000

# 1364SCP

013640003


## REVOLVING BODYWORK SUPPORT

### Specifications:

- Particularly suitable for bonnets, wings and doors
- Fitted with 4 castors - 2 steering with brakes
- Can be rotated up to 180°



**ROTATED UP TO 180°**

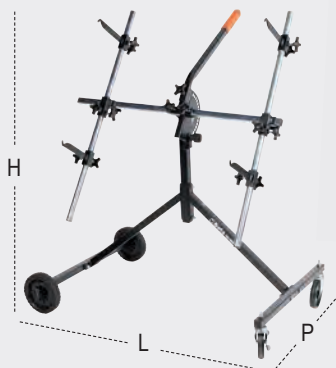

L mm	H mm	P mm
1100	1300	680



# 1364SP

013640004

## BODYWORK SUPPORT with suction cups

### Specifications:

- Particularly suitable for use with windows
- Fitted with 4 suction cups, Ø 95 mm
- Extension can be adjusted by means of a chain
- Polyethylene coated tube

**PARTICULARLY SUITABLE FOR USE WITH WINDOWS**



L mm	H mm
950	1250




# 3028

## HYDRAULIC PRESS



	3028 20	3028 30	3028 50
Maximum capacity	20 t	30 t	50 t
Manual 2-speed pump	✓	✓	✓
Moving piston	✓	✓	✓
Hydraulic safety in case of overloading	✓	✓	✓
Gauge	✓	✓	✓
Set of V-shaped prisms	✓	✓	✓
Hoist	X	X	✓

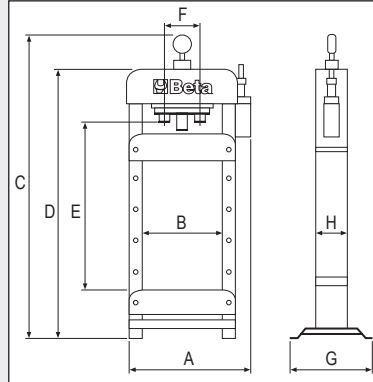

	Dimensions mm							
	A	B	C	D	E	F	G	H
3028 20	850	540	1830	1602	910	240	540	134
3028 30	850	540	1850	1650	990	240	540	148
3028 50	1100	750	1850	1810	820	280	650	200



**3028 20** 030280020

### Hydraulic press WITH MOVING PISTON

- Maximum capacity: 20 t
- Manual vertical top adjustment
- Sliding piston

98 kg

**3028 30** 030280030

### Hydraulic press WITH MOVING PISTON

- Maximum capacity: 30 t
- Manual vertical top adjustment
- Sliding piston

132 kg

**3028 50** 030280050

### Hydraulic press WITH MOVING PISTON AND HOIST

- Maximum capacity: 50 t
- Vertical top adjustment through hoist
- Sliding piston

241 kg

8148

**Robur**

EN 13157 


**MANUAL ROPE WINCH, aluminium alloy body, complete with operating lever, rope and hook**

Lightweight and portable, the Robur manual rope winch complies with EN 13157, is made from high-quality materials and is suitable for lifting, pulling, tensioning and fixing loads in all directions through the operating lever.

Generally connected to a fixed lashing point, it allows for highly precise load positioning and ensures safe operation in all directions - horizontal, vertical and tilted. Based on its compact, handy design, it is easy to install and use.

The Robur manual winch makes it possible to use ropes in any length, and its capacity can be increased by a factor of 2, 3, 4 or more - provided that its frame is inspected -, by using guide rollers and hooks with blocks in accordance with the reference standard.





- Safety factor: 4:1




WLL (t)	kg	Dimensions mm						
		A	B	B1	C	C1	F	L2
0,8	6,5	426	235	168	64	60	8,3	800
1,6	12,5	545	280	190	97	72	11	1200
3,2	28	660	325	230	116	91	16	1200



**ROPE LENGTH 20 m**



WLL t	
<b>8148-0,8</b>	0,8 081480008
<b>8148-1,6</b>	1,6 081480016
<b>8148-3,2</b>	3,2 081480032



## 1924XM


019240030

### COMPACT REVERSIBLE IMPACT WRENCH

- Single hammer impulse device
- Super compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle
- Balancing hook

The Beta 1924XM impact wrench delivers high performance in super compact dimensions. In addition, you can choose from 3 different power screwing positions, for optimal adjustment as needed.

3/8" CE



Free speed	rpm/min	9.000
Impulse device		Single hammer
Max. torque	Nm	515
Bolt capacity	Cl 8.8	M16●24 mm
Bolt capacity	Cl 12.9	M14●21 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	122

1,3 kg

## 1927PAL


019270009

### REVERSIBLE IMPACT WRENCH, made from composite material

- Double hammer impulse device
- 2" long anvil
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle

**ULTRA-POWERFUL 1750 Nm**

1/2" CE



Free speed	rpm/min	7.500
Impulse device		Double hammer
Max. torque	Nm	1.750
Bolt capacity	Cl 8.8	M24●36 mm
Bolt capacity	Cl 12.9	M20●30 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	290

2,2 kg

# 7372B



**O-GRAVITY WOVEN FABRIC SHOE, ultralightweight, hard-wearing and ultrabreathable**

- Heel stability support, traditional lacing
- Wide fit
- EVA outsole with durable nitrile rubber tread

EU	UK	Icon	Code
38	5		073720038
39	6		073720039
40	6,5		073720040
41	7		073720041
42	8		073720042
43	9		073720043
44	10		073720044
45	10,5		073720045
46	11		073720046
47	12		073720047
48	13		073720048



S1P SRC HRO

EN ISO 20345 2011



approximate weight for size 42 450 g

# 7376A



**O-GRAVITY MICROFIBRE AND MESH SANDAL, perforated and highly breathable**

- Heel stability support, traditional lacing
- Wide fit
- EVA outsole with durable nitrile rubber tread

EU	UK	Icon	Code
38	5		073760038
39	6		073760039
40	6,5		073760040
41	7		073760041
42	8		073760042
43	9		073760043
44	10		073760044
45	10,5		073760045
46	11		073760046
47	12		073760047
48	13		073760048



S1P SRC HRO

EN ISO 20345 2011



approximate weight for size 42 490 g

# 7316NG NewActive

**MESH AND SUEDE SHOE, HIGHLY BREATHABLE, with heel stability support**

- Composite toe cap
- Composite fibre penetration-proof insole

EU	UK	Icon	Code
35	2,5		073160635
36	3,5		073160636
37	4,5		073160637
38	5		073160638
39	6		073160639
40	6,5		073160640
41	7		073160641
42	8		073160642
43	9		073160643
44	10		073160644
45	10,5		073160645
46	11		073160646
47	12		073160647
48	13		073160648



S1P SRC

EN ISO 20345 2011



# 7316NB NewActive

**MESH AND SUEDE SHOE, HIGHLY BREATHABLE, with heel stability support**

- Composite toe cap
- Composite fibre penetration-proof insole

EU	UK	Icon	Code
35	2,5		073160735
36	3,5		073160736
37	4,5		073160737
38	5		073160738
39	6		073160739
40	6,5		073160740
41	7		073160741
42	8		073160742
43	9		073160743
44	10		073160744
45	10,5		073160745
46	11		073160746
47	12		073160747
48	13		073160748



S1P SRC

EN ISO 20345 2011





## 7212B NEW FLEX

**SUEDE SHOE, PERFORATED, with mesh inserts**

- Composite toe cap
- Composite fibre penetration-proof insole
- Anti-abrasion insert in toe cap area

EU	UK	Computer icon
35	2,5	072120235
36	3,5	072120236
37	4,5	072120237
38	5	072120238
39	6	072120239
40	6,5	072120240
41	7	072120241
42	8	072120242
43	9	072120243
44	10	072120244
45	10,5	072120245
46	11	072120246
47	12	072120247
48	13	072120248

AVAILABLE FROM  
END OF JULY



S1P SRC  
EN ISO 20345 2011



approximate weight for size 42 **490 g**

## 7213G NEW FLEX

**SUEDE SHOE, PERFORATED, with highly breathable mesh inserts**


- Composite toe cap
- Composite fibre penetration-proof insole
- Anti-abrasion insert in toe cap area

EU	UK	Computer icon
35	2,5	072130135
36	3,5	072130136
37	4,5	072130137
38	5	072130138
39	6	072130139
40	6,5	072130140
41	7	072130141
42	8	072130142
43	9	072130143
44	10	072130144
45	10,5	072130145
46	11	072130146
47	12	072130147
48	13	072130148

AVAILABLE FROM  
END OF JULY



S1P SRC  
EN ISO 20345 2011



approximate weight for size 42 **490 g**

## 7214G NEW FLEX

**ACTION NUBUCK SHOE, WATER-REPELLENT, with anti-abrasion insert in toe cap area**

- Composite toe cap
- Composite fibre penetration-proof insole

EU	UK	Computer icon
35	2,5	072140235
36	3,5	072140236
37	4,5	072140237
38	5	072140238
39	6	072140239
40	6,5	072140240
41	7	072140241
42	8	072140242
43	9	072140243
44	10	072140244
45	10,5	072140245
46	11	072140246
47	12	072140247
48	13	072140248

AVAILABLE FROM  
END OF JULY



S3 SRC  
EN ISO 20345 2011



approximate weight for size 42 **500 g**

## 7218G NEW FLEX

**ACTION NUBUCK ANKLE SHOE, WATER-REPELLENT, with anti-abrasion insert in toe cap area**

- Composite toe cap
- Composite fibre penetration-proof insole

EU	UK	Computer icon
35	2,5	072180135
36	3,5	072180136
37	4,5	072180137
38	5	072180138
39	6	072180139
40	6,5	072180140
41	7	072180141
42	8	072180142
43	9	072180143
44	10	072180144
45	10,5	072180145
46	11	072180146
47	12	072180147
48	13	072180148

AVAILABLE FROM  
END OF JULY

**QUICK OPENING SYSTEM**



S3 SRC RS  
EN ISO 20345 2011



approximate weight for size 42 **550 g**

# 7818

## WORK TROUSERS, MULTIPOCKET STYLE, with stretch fabric inserts

- T/C canvas, 65% polyester, 35% cotton, 260 g/m<sup>2</sup>
- Stretch fabric inserts, 90% nylon, 10% spandex; 260 g/m<sup>2</sup>
- Knee pad pockets and leg bottoms reinforced in polyester 300D
- Tearproof crotch
- Higher waist in rear part for increased back protection
- Stretch fabric insert in lumbar region
- Stretch fabric insert in inside leg for easier movements
- Stretch waistband on sides
- Two large front pockets, one with small pocket
- Two rear pockets with strap closure
- Large side pockets with strap closure, one with badge insert, one with tool band
- Waist key ring
- Knee pad pockets and reinforced leg bottoms

AVAILABLE FROM BEGINNING OF JULY



REGULAR FIT

### 7818G GREY

XS	46	078180000
S	48	078180001
M	50	078180002
L	52	078180003
XL	54	078180004
XXL	56	078180005
XXXL	58	078180006

### 7818BL BLUE

XS	46	078180100
S	48	078180101
M	50	078180102
L	52	078180103
XL	54	078180104
XXL	56	078180105
XXXL	58	078180106

## 7830SN BLACK

### STRETCH WORK TROUSERS

- T/C twill, 63% polyester, 34% cotton, 3% stretch fabric, 200 g/m<sup>2</sup>
- Tearproof crotch
- Stretch waistband on sides
- Two large front pockets, one with small pocket
- Two rear pockets with strap closure
- Large left-side pocket with strap closure and badge insert
- Ruler pocket and hammer loop
- Knee pad inserts

SLIM FIT



AVAILABLE FROM BEGINNING OF JULY

XS	46	078300100
S	48	078300101
M	50	078300102
L	52	078300103
XL	54	078300104
XXL	56	078300105
XXXL	58	078300106

## 7831SN BLACK

### STRETCH BERMUDA SHORTS


- T/C twill, 63% polyester, 34% cotton, 3% stretch fabric, 200 g/m<sup>2</sup>
- Tearproof crotch
- Stretch waistband on sides
- Two large front pockets, one with small pocket
- Two rear pockets with strap closure
- Large left-side pocket with strap closure and badge insert
- Ruler pocket and hammer loop

SLIM FIT



STRETCH

XS	46	078310100
S	48	078310101
M	50	078310102
L	52	078310103
XL	54	078310104
XXL	56	078310105
XXXL	58	078310106







## 7818LN BLACK

*Lady*

### WOMEN'S WORK TROUSERS, multipocket style

- 97% cotton, 3% stretch fabric, 220 g/m<sup>2</sup>
- Stretch fabric inserts, 90% nylon, 10% spandex; 260 g/m<sup>2</sup>
- Knee pad pockets and leg bottoms reinforced in polyester 300D
- Tearproof crotch
- Stretch fabric insert in inside leg for easier movements
- Stretch waistband on sides
- Two large front pockets, one with small pocket
- Two rear pockets with strap closure
- Large side pocket with strap closure
- Waist key ring
- Knee pad pockets and reinforced leg bottoms



AVAILABLE FROM SEPTEMBER

SLIM FIT

XS	38	078180200
S	40	078180201
M	42	078180202
L	44	078180203
XL	46	078180204
XXL	48	078180205
XXXL	50	078180206



## 7547

### THREE-BUTTON POLO SHIRT, 100% cotton, 200 g/m<sup>2</sup>

#### 7547AZ LIGHT BLUE

XS	075470500
S	075470501
M	075470502
L	075470503
XL	075470504
XXL	075470505
XXXL	075470506

#### 7547R RED

XS	075470600
S	075470601
M	075470602
L	075470603
XL	075470604
XXL	075470605
XXXL	075470606



## 7549

### WORK T-SHIRT, 100% cotton, 150 g/m<sup>2</sup>

#### 7549AZ LIGHT BLUE

XS	075490500
S	075490501
M	075490502
L	075490503
XL	075490504
XXL	075490505
XXXL	075490506

#### 7549R RED

XS	075490600
S	075490601
M	075490602
L	075490603
XL	075490604
XXL	075490605
XXXL	075490606






# Beta

winning, together

**Fabio Quartararo**  
MotoGP World Champion 2021

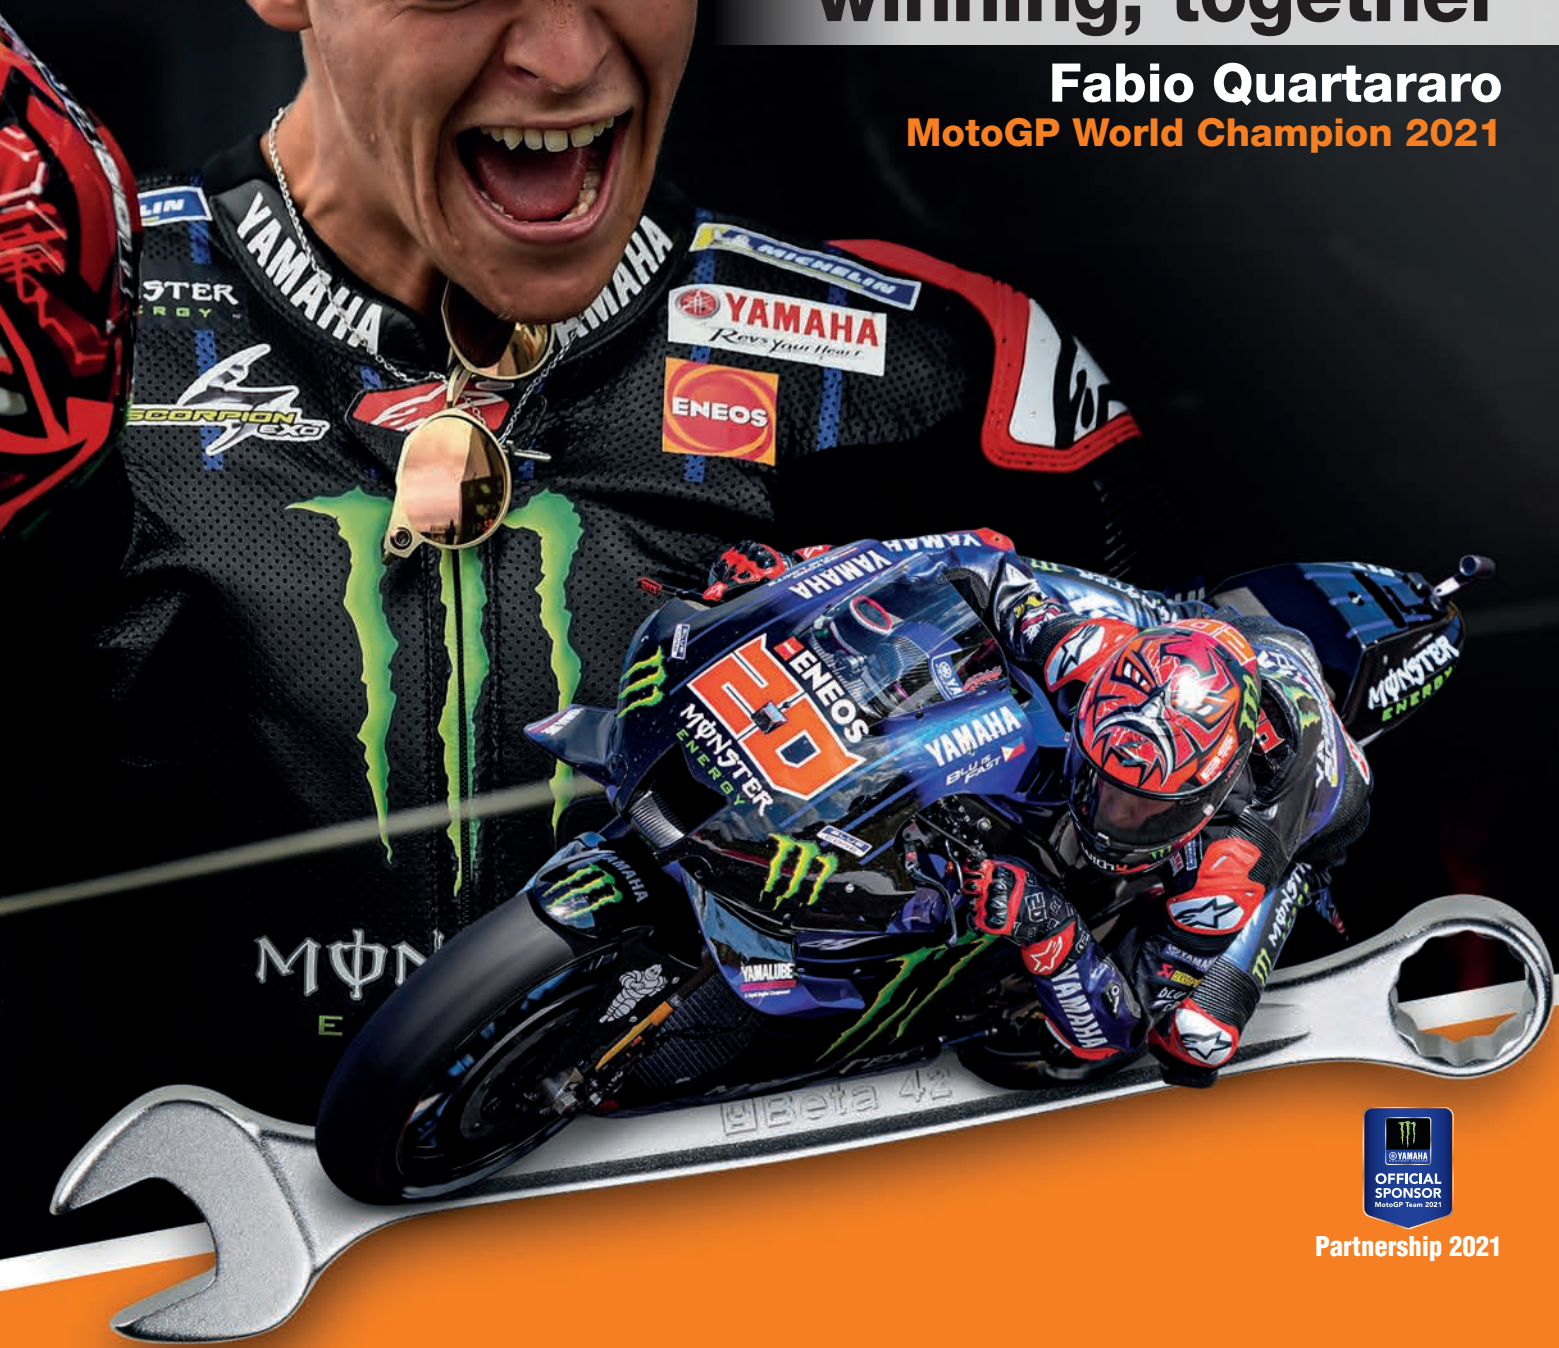

Partnership 2021

998023913



Beta Utensili S.p.A. | via Volta, 18 | 20845 Sovico (MB) | ph. +39 039 20771  
[www.beta-tools.com](http://www.beta-tools.com)